

MODEL NO.
6507R1830A3



Cotterman® SERIES 6500

WELDED STEEL ROLL-N-FOLD LADDER

THE COTTERMAN SERIES 6500 ROLL-N-FOLD LADDER is a portable steel safety ladder that can be folded for transporting. The rear of the ladder has large 10" diameter semi-pneumatic wheels allowing it to roll easily. Large rubber pads on the front legs hold the ladder secure during use. The ladder is moved by tilting and rolling it like a wheelbarrow. The optional Safe-Lock added to the step side provides greater mobility while set-up.

FEATURES:

- Rigid 1" O.D. tubular frame is designed to be folded.
- Large 10" diameter ball bearing semi-pneumatic wheels are mounted on heavy 3/4" axles.
- Treads are 7" deep and 16" wide, and are available in A1 expanded metal or A3 Grip Strut. The standard top step is 10" deep and 16" wide, and E4-20 is 20" deep and 16" wide.
- Gray powder coat is the standard finish. Beige, dark brown, yellow, black, green, blue, red, white, orange and light gray are available.
- Series 6500 ladders comply with OSHA 1910.29 and ANSI A14.7 standards with a 300 lb. load rating. Cal-OSHA models also available.



LARGE 10" DIA. SEMI-PNEUMATIC WHEELS

FOLDS FOR EASY TRANSPORTING

NO. STEPS INCL. TOP STEP	TOP STEP HEIGHT	OVERALL HEIGHT W/RAILS	BASE W"xL"	APPR. FOLDED DIMENSIONS W"xL"xH"	SHPG. WT.	MODEL NO.	A1 TREAD	A1 TREAD W/E4-20	A3 TREAD	A3 TREAD W/ E4-20
5	50"	80"	30x46	32x86x24	85	6505R1830				
6	60"	90"	30x53	32x98x24	95	6506R1830				
7	70"	100"	30x58	32x110x24	105	6507R1830				
8	80"	110"	30x65	32x122x24	127	6508R1830				
9	90"	120"	30x72	32x134x24	158	6509R1830				
10	100"	130"	30x78	32x146x24	175	6510R1830				
11	110"	140"	30x86	32x158x24	190	6511R1830				
12	120"	162"	30x92	32x176x36	203	6512R1830				
13	130"	172"	40x99	42x188x36	475	*6513R1840				
14	140"	182"	40x106	42x200x36	545	*6514R1840				
15	150"	192"	40x112	42x212x36	585	*6515R1840				
16	160"	202"	40x119	42x224x36	610	*6516R1840				

*Protective crating required for shipment, please add \$ net per step to ladder price, includes 10, 11 & 12 step with E4-20 top step.

OPTION B4, Safe-Lock available on all sizes, add \$ to price.


STANDARD FEATURES AND OPTIONS

For ladders shown on pages 2, 3, 4 and 5



Spring-loaded 2" swivel brake casters are provided on all 1-4 step ladders. When user stands on ladder, casters retract and the ladder stands on the rubber reinforced legs preventing movement.

OPTION B4 SAFE LOCK OPERATION



A. Stepping on bottom stem lowers trip bar, drops rubber tipped legs to floor to immobilize ladder.
B. Stepping on either pedal resets spring-return trip bar, places 4" dia. safe-lock casters in rolling position.

OPTION B4: Standard on 5 to 19 step, optional on 6500 series shown on pg. 5. add \$ to price.



FOLDING WORKSHEF

10" deep and wide as ladder. Fixed or folding (hardware included)

option G1 \$




WIRE BASKET

Removable wire basket with hooks (12"W x 18"L x 5"D).

option F1 \$


HOW TO SELECT THE PROPER LADDER

1. Select platform height based on operations to be performed or weight and bulk of objects to be carried. Maximum convenient working height is generally 5'0" to 6'0" above top step.
2. Particularly in the larger sizes, choose a wide ladder over a narrow one if space permits. For very bulky loads, consider a 32" wide ladder. Take into account whether people must pass ladder in aisle and where it must rest when not in use.
3. Consider limitations on ladder dimensions imposed by doorways, overhead obstructions, corners that ladders must turn, etc.
4. Baskets and shelves are available for resting or sorting merchandise while on the ladder.
5. Where aisles are narrow, consider narrow aisle ladders for easier maneuverability.
6. For unusual conditions not illustrated in this catalog, ask for suggestions and prices.

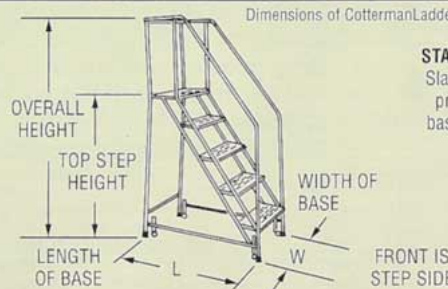

STABLE DESIGN

Slant leg design provides wider base for greater stability.



REPLACEMENT PARTS

2" caster box (complete for 1 ladder) \$ (ladder model required)

Rubber tips for 1" tubing, each \$

Rubber pads, 2 1/2" each \$

WARRANTY

All Cotterman products are guaranteed against defects in workmanship and materials for a period of one (1) year after shipment. At our discretion, Cotterman Company will repair or replace the product in question at no charge — subject to inspection. Freight damage, misapplication and misuse of the product are not covered by this warranty.



B1

RUBBER TIPS replace casters, no charge, OPTION B1



B7

SKID PLATES replace casters, no charge, OPTION B7